




# AquaTeak

NOTHING LIKE THE TEST  
OF TIME TO  
DEMONSTRATE PERFORMANCE



AquaTeak provides the look of teak with renowned anti-slip qualities at a fraction of the price. Manufactured from Thermoplastic, the two layers are fused together to provide an extremely resilient and natural looking product that requires no specialist sealant or varnish to maintain its appearance.

## **BENEFITS OF AQUATEAK**

Customisable to any design, logos and boat names can be engraved

Not effected by light amplification burning, suitable for large/moored boats

Marine grade PSA for fast installation


4 colour combinations available

Low maintenance, can be safely pressure washed

Can be used internally or externally


Economical alternative to teak decks

Highly durable and suitable for commercial applications

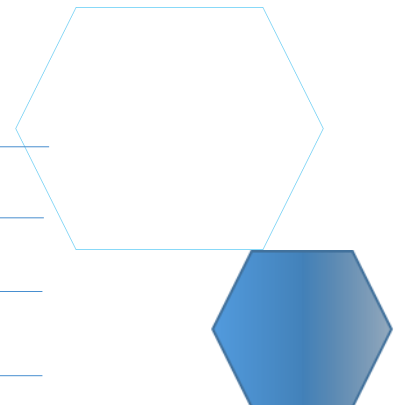

## BURMA / WHITE & BURMA / BLACK

Capture the richness and warmth of natural wood with AquaTeak's Burma Synthetic Teak Flooring. Drawing Inspiration from the deep, earthy tones of the Burma Tree, this flooring exudes a luxurious, golden-brown finish that enhances any space with timeless sophistication.

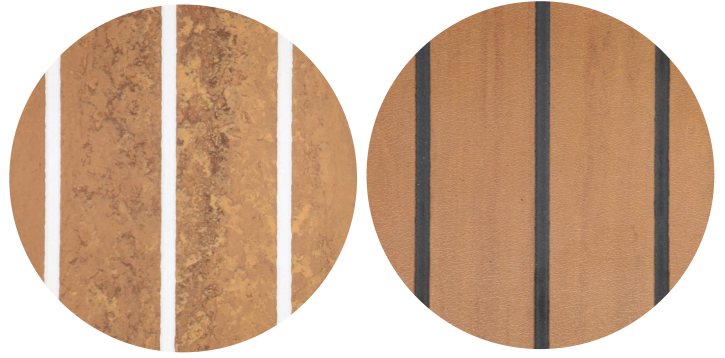

## ASPEN / BLACK

Elevate your spaces with the natural charm and durability of AquaTeak's Aspen Synthetic Teak Flooring. Inspired by the serene elegance of Aspen trees, this premium flooring solution offers a light, silvery hue reminiscent of the distinctive bark of Aspen forests, bringing a sophisticated, nature-inspired aesthetic to your deck or interior.

## JACKALBERRY / BLACK

Bring a touch of refined drama to your space with AquaTeak's Jackalberry Synthetic Teak Flooring. Showcasing the elegant, dusk-inspired hues of the Jackalberry Tree, this flooring features deep, muted tones with a natural, aged character that adds depth and sophistication to any environment.



## Product Specifications

Thickness	3mm
Weight	4kg/m2
Sheet Size	2400mm x 1200mm
Surface Hardness	ISO 48 82° IRHD
Abrasion Resistance	<u>Weight Loss</u> 500gm, 3000cyc 0.11gms <u>Thickness Loss</u> 500gm, 3000cyc 0.02mm
Slip Resistance Wet Pendulum Test	AS 4586 P5